


Product datasheet

Specifications

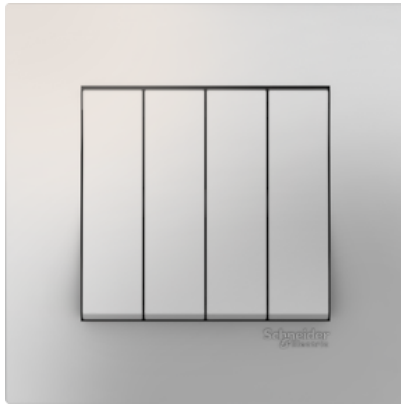

Vivace-one way switch 16 AX 250V-1 module -White

KB34S_1_WE_G3

Main

Range	Vivace
Product or component type	Switch
Device short name	KB34
Device application	Control switch
Additional switch application	On/off switching
Number of rocker	4
Switch function	1-way
Colour tint	White

Complementary

Technology type	Electromechanical
Device presentation	Complete product
Actuator	Rocker
Number of gangs	4 gangs
	White

Material	Polycarbonate: grid plate Polycarbonate: surround Nylon: base Polycarbonate: dolly Nylon: actuator Silver plated copper: bridge Brass: terminal cover
----------	---

Surface finish	Glossy
----------------	--------

Surface treatment	Untreated
-------------------	-----------

[Ue] rated operational voltage	220...250 V
--------------------------------	-------------

Type of packing	Plastic bag
-----------------	-------------

Network type	AC
--------------	----

Quantity per set	1
------------------	---

Sale per indivisible quantity	1
-------------------------------	---

Rated current	10 AX
---------------	-------

Projecting depth	8 mm
------------------	------

Device mounting	Flush
-----------------	-------

Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Connections - terminals	Screw terminal
Embedding depth	25 mm
Number of terminals	8 10 AX at 250 V AC, inductive 10 AX at 250 V AC, fluorescent 10 A at 250 V AC, resistive 250 V AC
Network frequency	50/60 Hz
Contacts material	Brass and phosphor bronze 8 screw terminals
Terminal identifier	L2 COM L1
Tightening torque	0.4 N.m
Clamping connection capacity	<= 2.5 mm ² for rigid or stranded cable(s)
Wire stripping length	12 mm
Dielectric strength	2000 V
Minimum load breaking capacity	200 operations 1.25 In and 1.1 Un
Width	86 mm
Height	86 mm
Depth	37 mm
Product weight	0.0829 kg

Environment

Standards	IEC 60669
Product certifications	SNI
Ambient air temperature for operation	-5...40 °C
Relative humidity	0...95 %
Operating altitude	0...2000 m
Environmental characteristic	Indoor use
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.6 cm
Package 1 Width	2.4 cm
Package 1 Length	8.6 cm
Package 1 Weight	85 g

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant

[EU RoHS Declaration](#)

Mercury free	Yes
---------------------	-----

China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
------------------------------	---

RoHS exemption information	Yes
-----------------------------------	-----

Contractual warranty

Warranty	18 months
-----------------	-----------

Recommended replacement(s)