

# ViewSonic® PROYEKTOR PG706HD


## Fitur Utama

- Full HD 1080p Resolution
- 4000 ANSI lumens
- Digital Vertical Lens Shift
- Dual HDMI
- Up to 20,000 lamp hour (SuperEco+ mode)



## Deskripsi Produk

The ViewSonic PG706HD features 4000 ANSI lumens of brightness to project the finest of details in any ambient setting. High brightness and a Full HD 1920 x 1080 resolution provide you with perfect projection in any medium sized space, such as a meeting room or classroom. The PG706HD comes with an energy-saving SuperEco+ mode that reduces power consumption and extends lamp life to 20,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. In addition to dual HDMI, Video, S-Video, and VGA, the projector is integrated with RS232 and LAN, certified by Crestron, AMX, PJ Link and Extron networkable solutions, making it easy to control and monitor the projector remotely.

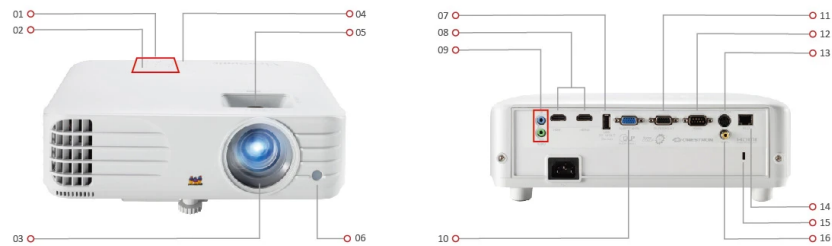

1. Keypad
2. LED Indicator
3. Lens
4. Power Keypad
5. Zoon/Focus
6. Front IR
7. USB Type A

8. HDMI Port
9. Audio In / Out
10. Computer In
11. Computer Out
12. RS-232
13. S-Video
14. RJ45

15. Kensington Lock
16. Video

**Kunjungi Kami**

[www.viewsonic.com](http://www.viewsonic.com)

**SPESIFIKASI**

Sistem Proyeksi:	0.47" 1080p
Resolusi Asli:	1920x1080
Kecerahan:	4000 ANSI Lumens
Rasio Kontras dengan Mode SuperEco:	12000:1
Display Color:	1.07 Billion Colours
Jenis Sumber Cahaya:	Lamp
Light Source Life (Normal):	4000
Light Source Life (SuperEco):	20000
Watt Lampu:	245W
Lensa:	F=2.0~2.05, f=15.843-17.445mm
Proyeksi Offset:	110%+/-6%
Throw Ratio:	1.5-1.65
Zoom Optik:	1.1x
Zoom Digital:	0.8x-2.0x
Ukuran gambar:	30"-300"
Throw Distance:	1.00m-10.96m (100"@3.32m)
Keystone:	+/- 40° (V)
Lens Shift V. Range:	Yes (+/- 5%)
Audible Noise (Eco):	32dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Dukungan Resolusi:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
Kompatibilitas HDTV:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Kompatibilitas Video:	NTSC, PAL, SECAM
Frekuensi Horizontal:	15K-102KHz
Vertical Scan Rate:	23-120Hz

**INPUT**

Computer in (berbagi dengan komponen):	1
Gabungan:	1
S-Video:	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio masuk (3,5 mm):	1
RJ45 Input:	1 (LAN control)

**OUTPUT**

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	10W
USB Tipe A (Daya):	1 (5V/ 1.5A)

**KONTROL**

RS232 (DB 9-pin male):	1
RJ45:	1

**LAINNYA**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Konsumsi daya:	Normal: 355W Standby: <0.5W
Suhu Operasional:	0~40°C
Berat bersih:	2.79kg
Dimensi (WxDxH) dengan Kaki Penyesuaian:	312x222x108mm
Bahasa OSD:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages

**STANDARD ACCESSORY**

Power Cord:	1
Kabel VGA:	1
Kontrol Jarak Jauh:	1 (w/ laser pointer)
QSG:	1

**AKSESORI OPSIONAL**

Lampu / Sumber Cahaya:	RLC-120
------------------------	---------